

Trombetta Defender Family



*“The Defender is
the best defense for
your electrical system.”*

The Defender DC Contactor is so tough it can handle environments with extreme temperatures, moisture and high vibration. It is designed to carry currents as low as 350 milliamps and as high as 200 amps. With coil Transient Volt Suppression (TVS), the Defender protects sensitive components in your system.

With built-in TVS and wide ranging current capability, it defends with durability, capability and tenacity – which makes it perfect for off-road and emergency equipment. From fire trucks to earthmovers, it will protect your electrical system with extreme toughness. Quite simply, the Defender is the best defense for your electrical system.

TROMBETTA 
DC Power Solutions for a Harsh World

414-410-0300 • trombetta.com

Defender DC Contactor Specifications

Coil Terminals	Deutch-2Pin Connector DT06-25
Contact Studs	5/16-24 Studs
Mounting Bracket	Closed Holes Mounting Bracket
O Ring material	O rings (7) – Buna N
Standard Operating Temperature Range	-40° C to 85° C

Coils

Contact

Model	Max Sustained Duty Cycle ¹	Max On Time	Pull In Voltage ²	Hold Voltage ²	Coil Resist Ohms	Resistive Load Carry/Interrupt Capability (Amps) ³	Inductive Load Carry/Interrupt Capability (Amps) ³	Peak Inductive Inrush Capability (Amps) ⁴	Electrical Cycle Life	Contact Material
12V Cont.	100%	Cont.	6.5	3.2	13.3	200/200	100/100	400	20,000	Silver
24V Cont.	100%	Cont.	12.9	6.5	49.7	100/100	100/100	400	20,000	Silver


¹Nominal coil voltage applied starting from 25° C DC Contactor temperature. Duty Cycle=On Time/(On Time + Off Time). ²Voltages listed are minimum required at 25° C coil temperature. Minimum voltage requirements will increase with coil temperature. ³Amps at Max Duty Cycle. ⁴Risetime ≥ 3 milliseconds to 80% of peak inrush with linear decay to run (carry) current in ≤.1 seconds.

Enter Complete Part Number Below –

Ordering Information • Some configurations are not available. Contact your Trombetta sales rep before ordering.

Family	Coil Connection Configuration	High Current Stud	Coil Voltage	Bracket Type	Bracket Location	Duty Cycle	Contact Material	Sealing
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4- Defender	0- Ungrounded Leads	4- Standard Defender	12- 12 Volt 24- 24 Volt	3- Standard Housing	1- Standard Location Fixed by Housing	0- 100% Sustained Continuous	Silver	2- Sealed Design

TYPICAL DIMENSIONS

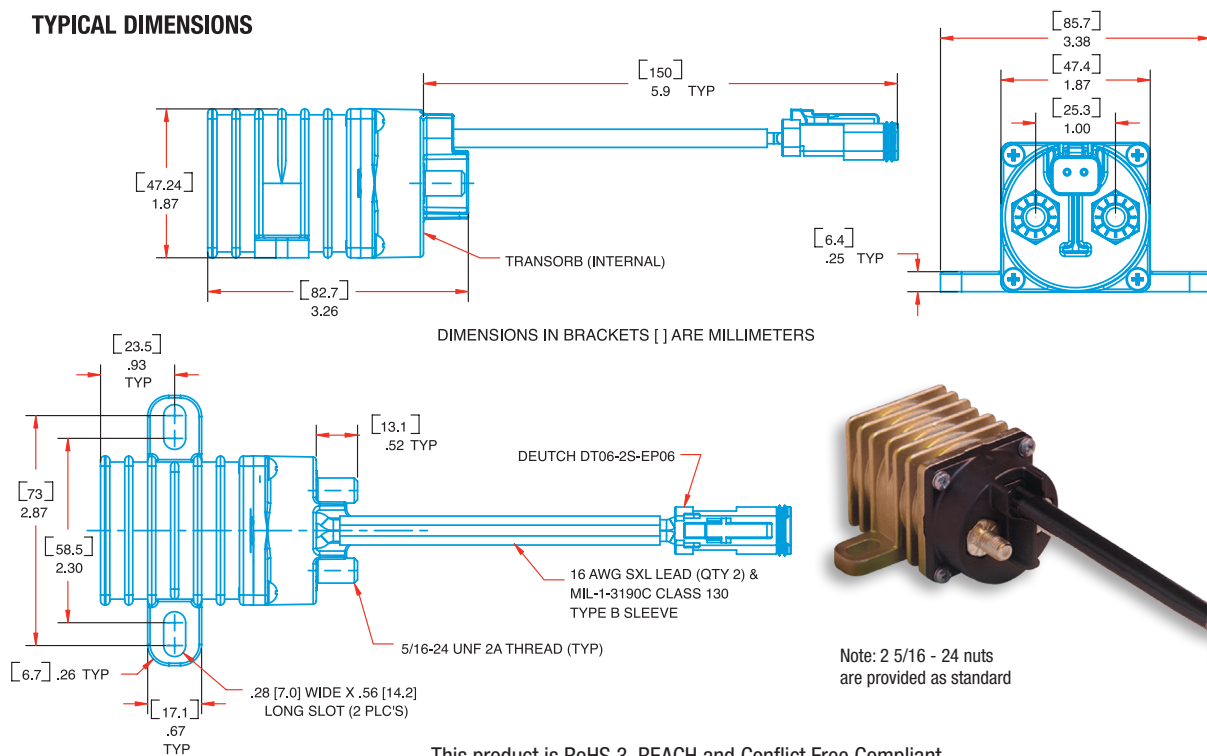

This product is RoHS 3, REACH and Conflict Free Compliant.

Revised 9/20